

BEST AVAILABLE COPY



1204/1061


מדינת ישראל  
STATE OF ISRAEL

Ministry of Justice  
Patent Office

משרד המשפטים  
לשכת הפטנטים

This is to certify that  
annexed hereto is a true  
copy of the documents as  
originally deposited with  
the patent application  
particulars of which are  
specified on the first page  
of the annex.

זאת לתעודה כי  
רצופים בזה העתקים  
נכונים של המסמכים  
שהופקדו לכתחילה  
עם הבקשה לפטנט  
לפי הפרטים הרשומים  
בעמוד הראשון של  
הנספח.

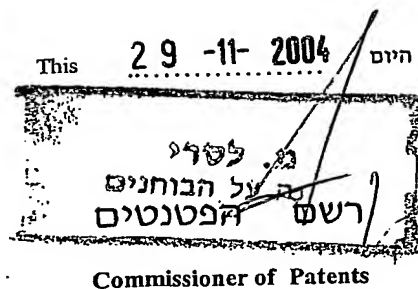

נתאשר  
Certified

לשימוש הלשכה  
For Office Use

חוק הפטנטים, תשכ"ז - 1967  
PATENT LAW, 5727 - 1967

ב ק ש ה ל פ ט נ ט  
Application for Patent

מספר:  
Number  
158968

תאריך:  
Date

חוקים/נדרחה  
Anle/Post-dated  
-11- 2003

אני, (שם המבקש, מענו ולגבי גוף מאוגד - מקום התאגדותו)  
I (Name and address of applicant, and in case of body corporate-place of incorporation)

DAGAN OFER  
Sha'ar ha'Amakim  
30097

דגן עפר  
שער העמקים  
30097

היותי הממציא

שם המצאה  
of an invention the title of which is

בעל אמצאה מכח  
Owner, by virtue of

מערכת סולרית אינטגרלית פתוחה לחימום מים  
בעלת קולט-מיכל והמוגנת מפני קפיאה

(בעברית)  
(Hebrew)

(באנגלית)  
(English)

Pressurized Open Loop Freeze Protected  
Integral Storage Collector Solar Water-Heating System

הכאן מתבקש בואת כי ינתן לי עליה פטנט  
hereby apply for a patent to be granted to me in respect thereof.

מבקש בואת כי ינתן לי עליה פטנט

• בקשת חלוקה • Application of Division		• בקשת פטנט מוסף • Application for Patent Addition		• דרישה ריין קדימה • Priority Claim		
מבקשת פטנט from Application		לבקשה/לפטנט to Patent/Apl.		מספר/סימן Number/Mark	תאריך Date	מדינת האגוד Convention Country
No. .... dated .....	מס' ..... מיום .....	No. .... dated .....	מס' ..... מיום .....			
• יסודי כללי / מיוחד - רצוף בזה / עוד יוגש P.O.A.: general/individual-attached/to be filed later- הוגש בענין ..... המזן למסירת פטנטים בישראל Address for Service in Israel דגן עפר שער העמקים 30097						
חתימת המבקש Signature of Applicant ofer dagan				היום ..... שנת ..... of the year		

לשימוש הלשכה  
For Office Use

טובס זה, כשהוא מוטבע בחותם לשכת הפטנטים ומושלם בספר ובתאריך ההגשה, הנו אישור להגשת הבקשה שפרטיה רשומים לעיל.  
This from, impressed with the Seal of the Patent Office and indicating the number and date of filing, certifies the filing of the  
application the particulars of which are set out above.

מערכת סולרית אינטגרלית פתוחה לחמום מים  
בעלת קולט-מיכל והמוגנת מפני קפיאה

**Pressurized Open Loop Freeze Protected**  
**Integral Storage Collector Solar Water-Heating System**

# APPLICATION FOR PATENT

Inventor: Dagan Ofer

Title: Pressurized Open Loop Freeze Protected Integral

5 Storage Collector Solar Water-Heating System

## FIELD OF THE INVENTION

The present invention relates to a solar energy system. More specifically, the present invention relates to  
10 a system for heating water by solar energy.

## BACKGROUND OF THE INVENTION

Solar water heaters are well known and in used for many years. They are divided to few groups. One of these  
15 groups is the integral solar water heater. These systems characterized by the fact that the face of the storage tank or part of it is used as solar absorber.

The advantages of Integral SWH Systems compare  
20 with standard SWH Systems. They are cheaper, easy to

install, reduce installation area, esthetic and attractive shape.

The disadvantages of Integral SWH Systems are that  
5 they have a very high heat loss, a very high mixing of hot and cold water in the storage tank, and usable hot water only at the end of the day.

The present invention developed to reduce the problems and disadvantages of the common SWH systems  
10 by using the integral storage collector configuration with a solution to the problems that pointed out earlier. The present invention is a system that includes all the parts that need to work properly. Easy-to-install with tree feeding lines (cold water inlet, hot water outlet and  
15 feeding electric wire cable), higher reliability, efficiency, ecstatic, and better performance. To achieve these goals, many technology improvements were introduced into the system.

The system, according to the present invention, is friendly, lightweight, flexible, simple and easy to install.

This simplicity enables to:

- 5   • Simplified system installation.
- Shortened system installation time.
- Decreases transportation difficulties.
- Reduce Installation cost.
- Reduce trouble-shooting problems.
- 10   • Compact construction with fewer parts and less production and assembly hours - the present invention builds of fewer parts and need less assembly hours than a standard SWH system, which cause a reduction of the time that is needed to produce the present invention.
- 15   • Simplified production processes enable reduce system costs.

The present invention has high level of esthetics. The system shape enables to integrate it in a simple way into an inclined roof or putting it on a flat roof.

The advantages of the invention compare to other integral solar systems are:

- 25   • Low heat loss (can be control by the developer).

- Short solar heating time to get a water temperature ready for use.
- Open loop, thermo - siphon system.
- Protected from Freezing.
- 5 • Electric heating element that operate as heat accelerator and heat any amount of water to the usage temperature.
- When the temperature of the water is less than need for usage, the electric heating element operates as a flow heater and raises the water  
10 temperature that leaves the storage tank.

The advantages of the invention compare to standard solar system are:

- 15 • The amount of raw material and the number of parts that used in the new Integral SWH System is less.
- The number of production process used in the new Integral SWH System is less.
- The transportation volume is smaller (it is possible :  
20 to transport more units in the same car).
- The present invention is a lightweight system and equipped with special units that enables to carry it in an easy and simple way.

25

- The present invention equipped with all the fittings that are assembly in it as an integral part.
  - The installation of the system of the present invention, in a location, is faster and simpler than a standard system. All the installer should do is:
    - To connect the cold water inlet.
    - To connect the hot water outlet.
    - To connect the Electric feeding wire.
  - The system, according to the present invention, enables to use the roof more efficiently and to install more new systems on the same roof area size (incline roof or flat roof).
- 15 The United States patent US 5,462,047 to Kleinwachter et al discloses an integral solar heating system, which is an un pressurized system and includes a single absorber. Moreover, this system has no protection against freezing. The United States patent US 6,009,906 to Salazar
- 20 discloses a method for protecting pipes in case of freezing by using a compressible flexible core that shrinks while freezing take place. In the present invention a shrinkable turbolator is used for this purpose. A turbolator is a helical shape core, usually made of metal, located inside



heat exchanger pipes for increasing heat transfer efficiency.

In the present invention a "thermo-siphon valve" is used.

5 The thermo-siphon valve is a well known one-way valve that allows flowing hot water up and prevents the back flow of water down.

### SUMMARY OF THE INVENTION

10 The present invention is a pressurized open-loop freeze protected integral storage collector solar water-heating system.

According to the teaching of the present invention it is  
15 provided a pressurized open-loop freeze protected integral storage collector solar water-heating system that includes:

- a tank having an inlet for city water inlet – located in the lower side of the tank, a first outlet for supplying water – located in the upper side of the tank - and a

second outlet for feeding water to a fin - tube absorber - located in the lower side of the tank:

- a thermally insulated layer, which is attached to the inside walls of the tank; and
- 5   ▪ an upper solar tank-absorber and a lower solar fin-tube absorber, each for the purpose of enabling a flow of water there-through to which solar heat collected by the absorbers can be transferred, wherein:
  - the upper solar tank-absorber is built inside the
  - 10   exposed wall of the tank, having an inlet and an outlet into the tank; and
  - the lower solar fin-tube absorber has an inlet and an outlet, wherein the inlet is connected to the second outlet of the tank and the outlet is connected to the
  - 15   inlet of the upper solar tank-absorber.

According to a preferred embodiment of the present invention the integral storage-collector solar water heating system is provided, wherein the water flow means of the

20   upper solar tank-absorber are created between the

thermally insulated layer and the exposed walls of the tank, by a grid of tunnels that are grooved in the thermally insulated layer.

5        According to another preferred embodiment of the present invention the integral storage-collector solar water heating system is provided, wherein the system is a low-profile solar system, which the bottom of the tank is located higher than the middle of the solar absorbers

10

      According to another preferred embodiment of the present invention the integral storage-collector solar water heating system is provided, wherein the thermally insulated layer is built of two parts, an upper part and a  
15 lower part, wherein the two parts are parted by a flexible material for the purpose of shrinking, while the water inside the solar-tank absorber is freezing.

      According to another preferred embodiment of the  
20 present invention the integral storage-collector solar

water heating system is provided, wherein the system further includes at least one of flexible means, located between the thermally insulated layer and the opposite wall of the exposed wall of the tank, for the purpose of shrinking while the water inside the solar tank absorber is freezing.

According to another preferred embodiment of the present invention there is provided an integral storage-collector solar water heating system, further includes:

- a water-supplying pipe, connected to the outlet of the tank enabling to supply water from the tank;
- an electrical heating element, the element is attached around the supplying pipe for heating – when the element is activated – the water that is flowing there-through; and
- a thermo-siphon valve that is connected between the end of the supplying-pipe, and second outlet located at the lower part of the tank or to the city water inlet in order to prevent the flow of the city water – directly or

via the tank - through the water outlet while supplying water, wherein the thermo-siphon enables the circle of water from the lower side to the upper side of the tank through the supplying-pipe while the water is being  
5 heated by the electrical element.

According to another preferred embodiment of the present invention there is provided an integral storage-collector solar water heating system, wherein the tank  
10 further includes a plurality of horizontal dividing-plates, dividing the tank into a plurality of cells, in order to increase stratification in the tank, wherein each of the dividing-plate have a small opening enabling water to pass through and wherein the opening is located opposite to the  
15 openings of the neighbors' dividing-plates.

According to another preferred embodiment of the present invention there is provided an integral storage-collector solar water heating system, wherein the lower  
20 solar fin-tube absorber further includes a turbolator longitudinally inside the water flow means in order to

increase heat transfer efficiency and wherein the turbolator is made of flexible material that is capable to be shrink while the water inside the water flow means is freezing.

5

According to another preferred embodiment of the present invention there is provided an integral storage-collector solar water heating system, further includes a water-supplying pipe, connected to the outlet of the tank  
10 enabling the tank to supply water and wherein the end of the water-supplying pipe and the inlet of the tank are on the same level, enabling to connect plurality of the system serially.

15

According to another preferred embodiment of the present invention there is provided an integral storage-collector solar water heating system, further includes at least one prop, pivotally joined to the system enabling to install the system in a variety of angles.

20

According to yet another preferred embodiment of the present invention there is provided an integral storage-collector solar water heating system, further includes a protractor and a compass, enabling to install  
5 the system in a variety of position according to given instructions.

According to another aspect of the present invention there is provided an integral storage-collector solar water  
10 heating system including:

- a tank having an inlet for city water inlet - located in the lower side of the tank - and an outlet for supplying water - located in the upper side of the tank, second outlet for feeding a fin - tube absorber  
15 - located in the lower side of the tank;
- a thermally insulated layer, which is attached to the inside walls of the tank, wherein the thermally insulated layer is built of two parts, an upper part and a lower part, wherein the two parts are parted by  
20 a flexible material;

- a solar tank-absorber and a solar fin-tube absorber, each for the purpose of enabling a flow of water there-through to which solar heat collected by the absorbers can be transferred, wherein:
  - 5     ○ the solar tank-absorber is created between the thermally insulated layer and the exposed walls of the tank, by a grid of tunnels that are grooved in the thermally insulated layer, having an inlet and an outlet into the tank; and
  - 10    ○ the solar fin-tube absorber has an inlet and an outlet, wherein the inlet is connected to the second outlet of the tank or to the city water inlet pipe and the outlet is connected to the inlet of the upper solar tank-absorber;
  - 15    ▪ a plurality of horizontal dividing-plates, dividing the tank into a plurality of cells, wherein each of the dividing-plate has a small opening enabling water to pass through and wherein the opening is located opposite to the openings of the neighbors' dividing-
  - 20    plates;



- at least one of flexible means, located between the lower part of the thermally insulated layer and the bottom of the tank, for the purpose of shrinking while the water inside the tunnels of the solar tank absorber is freezing;
- a water-supplying pipe, connected to the outlet of the tank enabling to supply water from the tank;
- an electrical heating element, the element is attached around the supplying pipe for heating - when the element is activated - the water that is flowing there-through;
- a thermo-siphon valve that is connected between the end of the supplying-pipe, parallel to the water outlet of the supplying-pipe and to the lower part of the tank or to the city water, in order to prevent the flow of the city water - directly or via the tank - through the water outlet while supplying water, wherein the thermo-siphon enables the circle of water from the lower side to the upper side of the

tank through the supplying-pipe while the water is being heated by the electrical element; and

- a turbolator located longitudinally inside the water flow means of the solar fin-tube absorber, wherein the turbolator is made of a flexible material that is capable to be shrink while the water inside the water flow means is freezing.

According to another preferred embodiment of the present invention there is provided an integral storage-collector solar water heating system, further includes a circulating pump in order to circle water from the tank through the absorbers.

According to another preferred embodiment of the present invention there is provided an integral storage-collector solar water heating system, wherein the circulating pump has a sensor that activates the circulating pump according to predetermined temperature and/or radiation level.

According to another preferred embodiment of the present invention there is provided an integral storage-collector solar water heating system, wherein the fin-tube absorber is located higher than the tank and the fin-tube absorber is empty when the circulation pump is not activated.

According to another aspect of the present invention there is provided a method of storage-collector solar water-heating, includes the following steps:

- installing a water-flow-grid in a tank, by grooving grids of tunnels in a thermally insulated layer and attaching the grooved side of the thermally insulated layer to the exposed wall inside of the tank, wherein the water-flow-grid has an inlet and an outlet;
- installing a thermo-siphon valve or a circulation pump between the inside space of the tank and outlet of the water-flow-grid ; and

- connecting an external absorber between the bottom of the tank and the inlet of the water-flow-grid.

## **BRIEF DESCRIPTION OF THE FIGURES**

5        The invention is herein described, by way of example only, with reference to the accompanying drawings. With specific reference now to the drawings in detail, it is stressed that the particulars shown are by way of example and for purposes of illustrative discussion of the preferred embodiments of the present invention only, and  
10        are presented in the cause of providing what is believed to be the most useful and readily understood description of the principles and conceptual aspects of the invention. In this regard, no attempt is made to show structural  
15        details of the invention in more detail than is necessary for a fundamental understanding of the invention, the description taken with the drawings making apparent to those skilled in the art how the several forms of the invention may be embodied in practice.

In the figures:

Figure 1 illustrates a basic drawing of the present invention.

Figure 2 illustrates a cross section of the tank with  
5 antifreeze protection elements.

Figure 3 illustrates the location of the dividing-plates inside the tank of the present invention.

Figure 4 illustrates a cross section of a preferred embodiment of the system, according to the present  
10 invention.

Figure 5 illustrates a serial connection of a plurality of the present invention system.

### **DESCRIPTION OF THE PREFERED EMBODIMENTS**

15 The present invention is an integral storage-collector solar water-heating system. The system includes a tank and two absorbers, wherein the entire system is full of water. The water circulation goes from the bottom of the tank trough a fine-tube absorber plate, which is located

between a transparent cover exposed to the sun and an insulated plate. The heated water passes through a second absorber that heats them to a usage temperature and cause them flows into the tank's space. The second  
5 absorber is created between the exposed wall of the tank, by a grid of tunnels that are grooved in a thermally insulated layer that are attached to the inside walls of the tank. The second absorber is covered with transparent cover too. The water flow into the upper part of the tank  
10 and a thermo-siphon valve prevents the back flow. After a double heating, the water is stored inside the tank and ready for use.

The system can also have an electrical heating option, a  
15 flexible turbolator in the fin-tube absorber to be shrunk in case of freezing and flexible means inside the tank for the same purpose.

The principles and operation of the integral storage-  
20 collector solar water-heating system according to the

present invention may be better understood with reference to the drawing and the accompanying description.

Referring now to the drawing, Figure 1 illustrates a basic drawing of the present invention. The system **10** is made of a water tank **11** with a thermally insulated layer **12** attached to the inside walls of the tank **11**. The tank **11** has an inlet **13** for connecting to the city water and an outlet **14** for supplying hot water. The system has two absorbers, a fin-tube absorber **15** and a tank absorber **16**, which have grooved tunnels in the thermally insulated layer **12** that are located in the exposed wall of the tank **11**. The city water enters to the tank **11** through the inlet **13** and flows via a pipe **20** to the bottom of the fin-tube absorber **15**. Solar energy heats the water. The temperature difference between the water in the absorber inlet pipe **20** and the water inside the absorber **15**,

creates a pressure that forces the water to move up – via the absorbers connection **17** - to the tank-absorber **16** wherein the water temperature is raised and the water flows through a thermo-siphon valve **22** and via the tank-absorber's outlet **18** into the tank **11**. For electrical heating option, an electrical heating element **19** is attached around the outlet pipe **14**. When the electrical element **19** is activated, and the water temperature is less than a thermostat set point, the supplied water is heated by the electrical element **19** and while water is not used the thermo-siphon valve **21** allows cold water to flow from the bottom of the tank **11**, via the pipe **20** and the outlet pipe **14**, into the tank **11** while the water is heated by the electrical element **19**.

15

Figure 2 illustrates a cross section of the tank with antifreeze protection elements. Two parts of thermal insulated layers are attached to the inside walls of the



tank **11**, the first part **12a** and the second part **12b**, both are connected by flexible connector **23**. Another flexible material **24** is installed between the second layer part **12b** and the unexposed tank wall **11**. In case that  
5 the water in the grooved tunnels **25** or in the tank are freezing, the first layer part **12a**, and or second layer part **12b**, is pushed down and the flexible connector **23** and or flexible material **24** are shrunk, which enables to evacuate space for the freezing water.

10

Figure 3 illustrates the location of the dividing-plates inside the tank of the present invention. A plurality of dividing plates **26** are separating the tank **11** to a plurality of horizontal cells in order to increase  
15 stratification in the tank **11**. Each plate has an opening **27** wherein each dividing-plate opening is located opposite to the openings of the neighbors' dividing-plates in order

to make the flow pattern **30** longer. Increasing the flow pattern length, cause a reduction of contact area between hot and cold layers. This reduction reduces heat transfer between the layers and increase solar fraction. Therefore  
5 the difference temperature between plates **26** is significant. Cells **28** & **29** are created with different temperature; the higher cell has the higher temperature. Since the hot water enters to the highest cell **28**, the temperature in this cell is higher than in the lower cell **29**  
10 and so on. The used water is supplied from the highest cell **28** and therefore the user has water with a high temperature.

15 Figure 4 illustrates a cross section of a preferred embodiment of the system, according to the present invention. Basically, the system comprised of a tank **11**

and two absorbers – the tank-absorber **16** and the fin-tube absorber **15**.

The bottom of the tank **11** is a little bit higher than half of the total height of the two absorbers **15&16** and lowers than the height of the two absorbers **15&16**. Reducing the tank's **11** height below the absorbers height, cause the thermosiphon force to decrease and by that cause a reduction of flow rate that increase the water temperature. Along the day the tank **11** is filled with hot water. Lowering the contact layer of hot and cold, reduce the thermosiphon forces, decrease the flow and increase the water temperature. By keeping the height of the bottom of the storage tank according to the new invention, the water temperature leaving the absorbers is high enough for usage. The difference temperature between cells is significant. Cells are created, between the dividing plates **27**, with different temperature; the higher cell has the higher temperature. Since the hot water enters to the

highest cell, the temperature in this cell is higher than in the lower cell and so on. The used water is supplied from the highest cell and therefore the user has water with usage temperature.

5

A transparent plate **33** covers both absorbers **15** & **16** and the fin-tube absorber **15** has an insulated back by a thermal insulated plate **31**. The system is assembled by additional elements, which will describe as the following.

10

The tank-absorber **16** is created by the exposed wall **11a** of the tank **11** and the layer-part **12a** of the thermal insulated layer **12** that is attached to the exposed wall **11a**, by tunnels **25** that are grooved in the layer-part **12a**.

15

The city water enters the tank **11** through the tank inlet **13** and via a pipe **20**, which flows to the bottom of

the fin-tube absorber **15** wherein the solar energy is collected and is transferred to the water. The hot water flows up through a connector **17** to the tunnels **25** of the tank-absorber **16**, the water temperature is raised and  
5 the water flows through a thermo-siphon valve **22** into the tank **11**. In order to keep the water temperature, a thermal-insulated layer **12** is attached to the inside walls of the tank **11**. A plurality of dividing plates **26** are installed inside the tank **11** dividing it into a cells,  
10 wherein each dividing plate **26** has an opening **27**, which is located opposite to the openings of the neighbors' dividing-plates. This structure is made in order to increase stratification in the tank.

15 To protect the system in case of freezing, the thermal insulated layer **12** is divided and connected by a flexible connector **23** and a flexible material **24** is

installed between the tank's wall and the layer **12**. In case that the water in the grooved tunnels **25** or in the tank **11** freeze, the first layer part **12a**, and/or second layer part **12b**, is pushed down and the flexible connector **23** and/or flexible material **24** are shrunk, which enables to evacuate space for the freezing water.

To avoid freezing damages in the fin-tube absorber **15**, it is possible to install it higher than the tank-absorber **16**. In this case, a circulation pump is installed instead of the thermo-siphon valve **22** and the pump is activated in dependence to the radiation and/or temperature. In a low radiation, the temperature falls down; the pump stops and the fin-tube absorber **15** drain from water. This mode is called auto-drain.

For electrical heating option, an electrical heating element **19** is attached around the water-supplying pipe

**14**, which heats the flow water there through, while activated and thermostat set point is higher then water temperature.

5        In the period of time when water is not supplied, the water inside the supplying pipe **14** is heated by the electrical element **19** and flows to the tank **11** while sucking cold water from the tank's bottom via a pipe **20** through a thermo-siphon valve **21**, which prevents hot  
10    water back flow.

The system includes at least one prop **32** enabling to install the system in a variety of angles.

15        To achieve maximal solar thermal efficiency, it is recommended that the height of the tank's bottom from the system bottom should be a little bit more than half of the total height of the system.

Figure 5 illustrates a serial connection of a plurality of the present invention system. In a preferred embodiment the inlet **13** and the outlet **14** of the system are in the same level, enabling to connect the outlet **14** of system **A** to the inlet **13** of system **B** and the same system **B** to system **C**, having three systems connected serially.

10

Although the invention has been described in conjunction with specific embodiments thereof, it is evident that many alternatives, modifications and variations will be apparent to those skilled in the art, accordingly, it is intended to embrace all such alternatives, modifications and variations that fall within the spirit and broad scope of the appended claims.



## WHAT IS CLAIMED IS:

1. An integral storage-collector solar water-heating system comprising:

- a tank having an inlet for city water inlet - located in the lower side of said tank, a first outlet for supplying water - located in the upper side of said tank - and a second outlet for feeding water to a fin - tube absorber - located in the lower side of said tank;
- a thermally insulated layer, which is attached to the inside walls of said tank; and
- an upper solar tank-absorber and a lower solar fin-tube absorber, each for the purpose of enabling a flow of water there-through to which solar heat collected by the absorbers can be transferred, wherein:
  - said upper solar tank-absorber is built inside the exposed wall of said tank, by a grid of tunnels that are grooved in said thermally insulated layer, having an inlet and an outlet into said tank; and

- said lower solar fin-tube absorber has an inlet and an outlet, wherein said inlet is connected to said second outlet of said tank and said outlet is connected to said inlet of said upper solar tank-absorber.

2. The system of claim 1, wherein the water flow means of said upper solar tank-absorber are created between said thermally insulated layer and the exposed walls of said tank, by a grid of tunnels that are grooved in said thermally insulated layer.
3. The system of claim 1, wherein said system is a low-profile solar system, which the bottom of said tank is located higher than the middle of said solar absorbers.
4. The system of claim 1, wherein said thermally insulated layer is built of two parts, an upper part and a lower part, wherein said two parts are parted by

flexible material for the purpose of shrinking while the water inside said solar-tank absorber is freezing.

5. The system of claim 1, wherein said system further includes at least one of flexible means, located between said thermally insulated layer and the opposite wall of said exposed wall of said tank, for the purpose of shrinking while the water inside said solar tank absorber is freezing.

6. The system of claim 1, further includes:

- a water-supplying pipe, connected to said outlet of said tank enabling to supply water from said tank;
- an electrical heating element, said element is attached around said supplying pipe for heating - when said element is activated - the water that is flowing there-through;
- a thermo-siphon valve that is connected between the end of said supplying-pipe, and second outlet locate at the lower part of said tank or to the city water

inlet in order to prevent the flow of the city water - directly or via said tank - through said water outlet while supplying water, wherein said thermo-siphon enables the circle of water from the lower side to the upper side of said tank through said supplying-pipe while said water is being heated by said electrical element.

7. The system of claim 1, wherein said tank further includes a plurality of horizontal dividing-plates, dividing said tank into a plurality of cells, in order to increase stratification in tank, wherein each of said dividing-plate has a small opening enabling water to pass through and wherein said opening is located opposite to the openings of the neighbors' dividing-plates.

8. The system of claim 1, wherein said lower solar fin-tube absorber further includes a turbolator longitudinally inside the water flow means in order to

increase heat transfer efficiency and wherein said turbolator is made of flexible material that is capable to be shrunk while the water inside said water flow means is freezing.

9. The system of claim 1, further includes a water-supplying pipe, connected to the outlet of said tank enabling said tank to supply water and wherein the end of said water-supplying pipe and the inlet of said tank are on the same level, enabling to connect plurality of said system serially.

10. The system of claim 1, further includes at least one prop, pivotally joined to said system enabling to install said system in a variety of angles.

11. The system of claim 10, further includes a protractor and a compass, enabling to install said system in a variety of position according to given instructions.

12. An integral storage-collector solar water-heating system comprising:

- a tank having an inlet for city water inlet - located in the lower side of said tank - and an outlet for supplying water - located in the upper side of said tank, second outlet for feeding a fin - tube absorber - located in the lower side of said tank;
- a thermally insulated layer, which is attached to the inside walls of said tank, wherein said thermally insulated layer is built of two parts, an upper part and a lower part, wherein said two parts are parted by flexible material ;
- a solar tank-absorber and a solar fin-tube absorber, each for the purpose of enabling a flow of water there-through to which solar heat collected by the absorbers can be transferred, wherein:
  - said solar tank-absorber is created between said thermally insulated layer and the exposed walls of said tank, by a grid of tunnels that are grooved in

said thermally insulated layer, having an inlet and an outlet into said tank; and

- said solar fin-tube absorber has an inlet and an outlet, wherein said inlet is connected to said second outlet of said tank or to the city water inlet pipe and said outlet is connected to said inlet of said upper solar tank-absorber;
- a plurality of horizontal dividing-plates, dividing said tank into a plurality of cells, wherein each of said dividing-plate has a small opening enabling water to pass through and wherein said opening is located opposite to the openings of the neighbors' dividing-plates;
- at least one of flexible means, located between said lower part of said thermally insulated layer and the bottom of said tank, for the purpose of shrinking while the water inside said solar tank absorber is freezing;
- a water-supplying pipe, connected to said outlet of said tank enabling to supply water from said tank;

- an electrical heating element, said element is attached around said supplying pipe for heating - when said element is activated - the water that is flowing there-through;
- a thermo-siphon valve that is connected between the end of said supplying-pipe, parallel to the water outlet of said supplying-pipe and to the lower part of said tank or to the city water, in order to prevent the flow of the city water - directly or via said tank - through said water outlet while supplying water, wherein said thermo-siphon enables the circle of water from the lower side to the upper side of said tank through said supplying-pipe while said water is being heated by said electrical element; and
- a turbolator located longitudinally inside the water flow means of said solar fin-tube absorber, wherein said turbolator is made of flexible material that capable to be shrunk while the water inside said water flow means is freezing.



13. The system of claim 12, further includes a circulating pump in order to circulate water from said tank through said absorbers.

14. The system of claim 13, wherein said circulating pump has a sensor that activates said circulating pump according to predetermined temperature and/or radiation level.

15. The system of claim 14, wherein said fin-tube absorber is located higher than said tank and said fin-tube absorber is empty when said circulation pump is not activated.

16. A method of storage-collector solar water-heating comprising:

- installing a water-flow-grid in a tank, by grooving grid of tunnels in a thermally insulated layer and attaching the grooved side of said thermally insulated layer to the exposed wall inside of said

tank, wherein said water-flow-grid has an inlet and an outlet;

- installing a thermo-siphon valve or a circulation pump between said inside space of said tank and outlet of said water-flow-grid ; and
- connecting an external absorber between the bottom of said tank and the inlet of said water-flow-grid.

ofer dagan

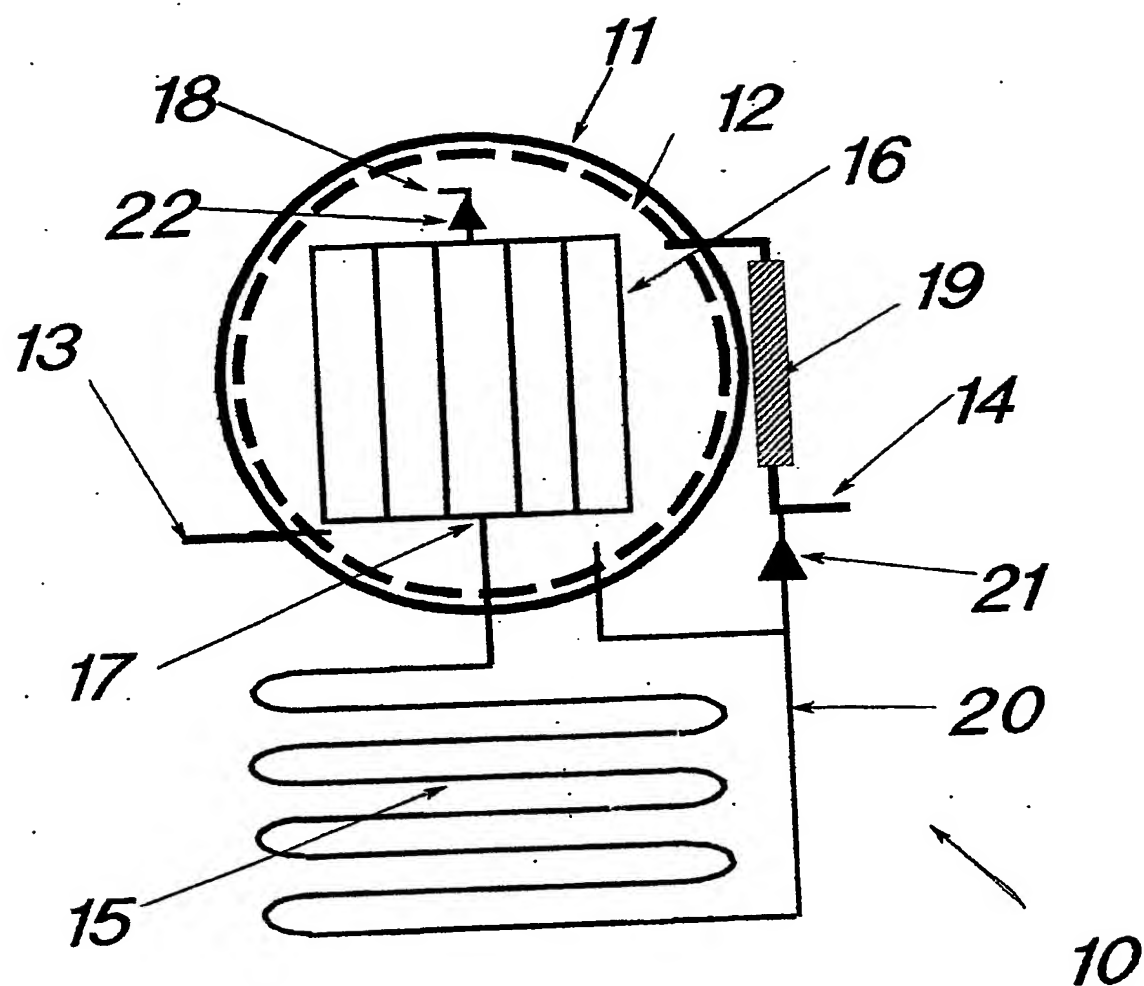
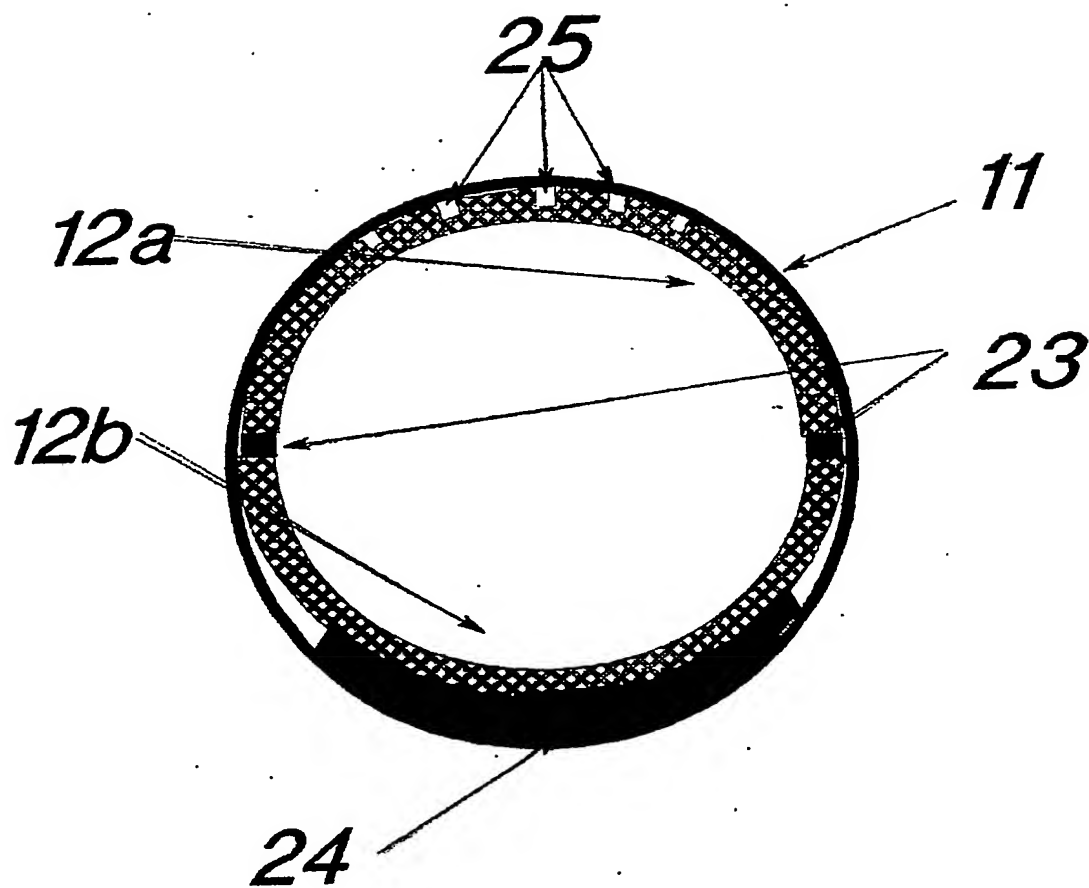


FIGURE 1



**FIGURE 2**

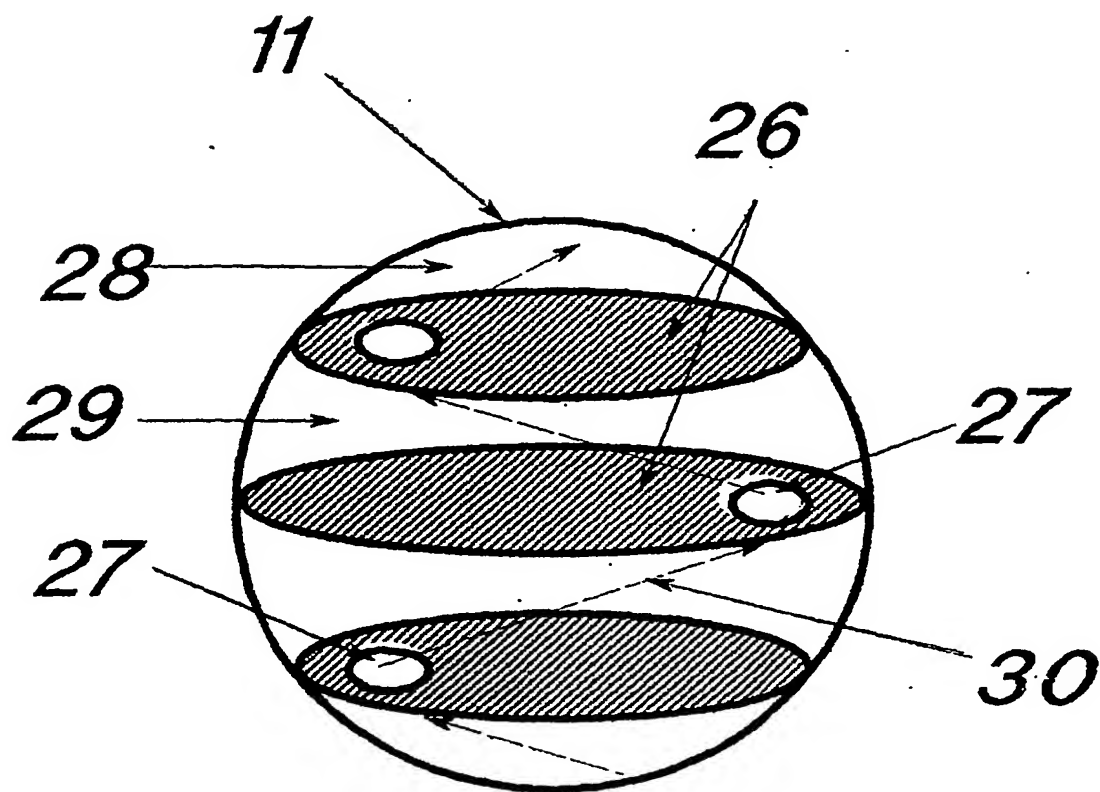


FIGURE 3

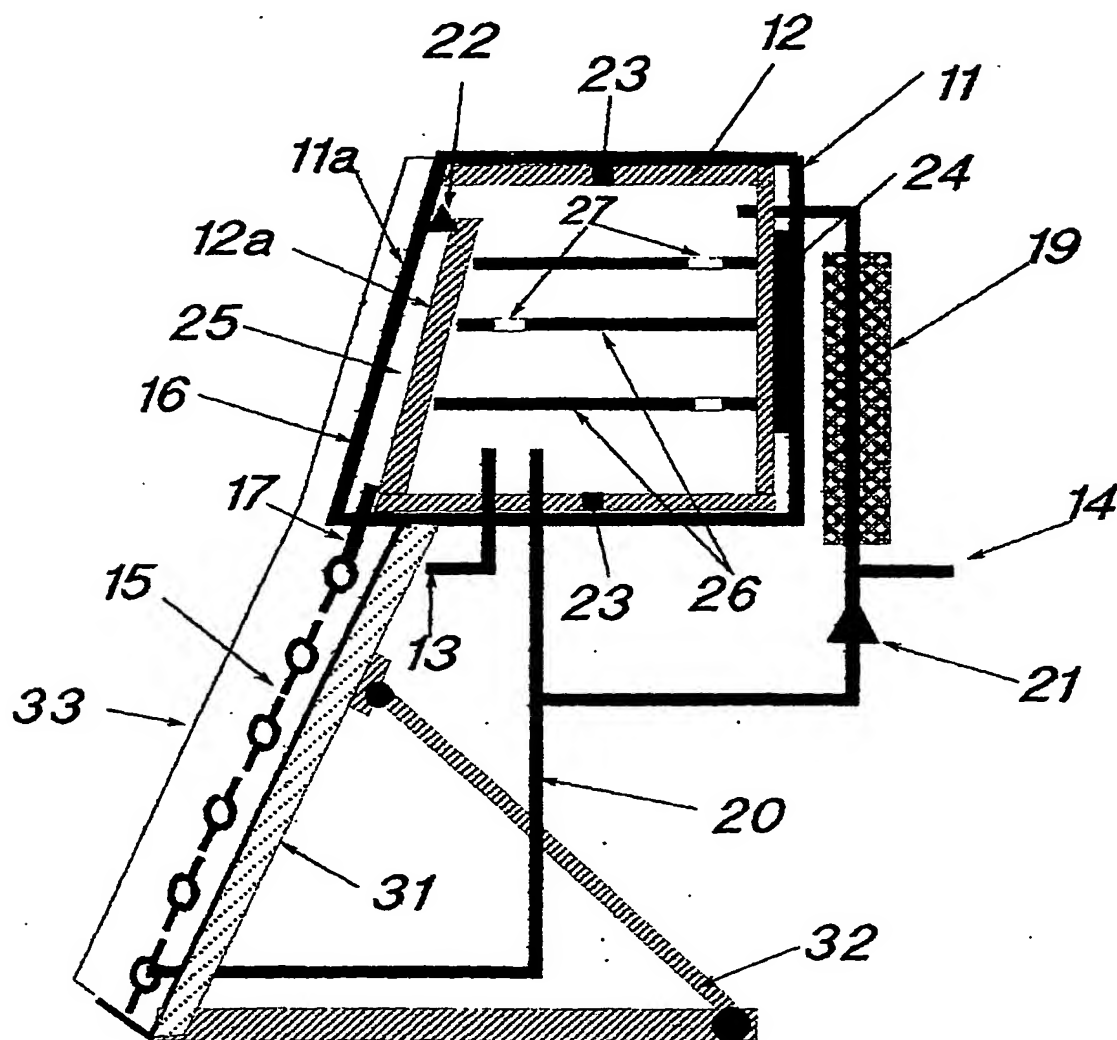
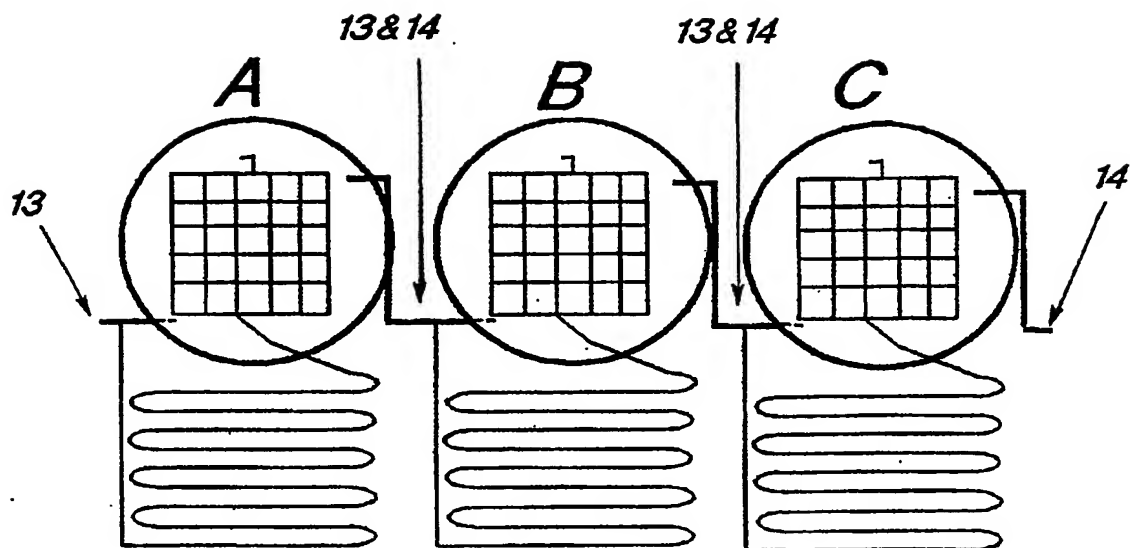


FIGURE 4



**FIGURE 5**

# Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/IL04/001061

International filing date: 18 November 2004 (18.11.2004)

Document type: Certified copy of priority document

Document details: Country/Office: IL  
Number: 158968  
Filing date: 20 November 2003 (20.11.2003)

Date of receipt at the International Bureau: 03 January 2005 (03.01.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland  
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record.**

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☒ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**